

Country Lane 3 Drawer/2 Door Dresser

Style #231-150 (Amber Butternut) DPCI# 074-05-0138

Assembly Instructions (Carysbrook)

CONGRATULATIONS

You've purchased a fine furniture product by



All of our easy-to-assembly furniture is solidly built and rigorously tested to ensure years of enjoyment.

We're here to help. Just call **1-800-782-3876** or e-mail **CISupport@Thomasville.com**

BEFORE YOU BEGIN

You may find it helpful to have a helper while assembling unit.

We've included easy to follow step-by-step instructions which have been carefully written to ensure quick, easy assembly of your furniture. Be sure to read the instructions (a time saver in the long run).

Identify all parts and hardware. If any pieces are missing call **Toll Free number 1-800-782-3876** or **e-mail CISupport@Thomasville.com** for replacement parts. For faster service, have the style number handy when calling.

Questions?

We're here to help. You may e-mail **CISupport@Thomasville.com** or call **1-800-782-3876** between **8:00a.m. - 9:00p.m., Monday - Friday** and **9:00a.m. - 5:00p.m., Saturday (Eastern Time)**. **Holiday weekends will not be staffed.** For faster service, have the style number handy when calling.




WARNING...This unit is to be used for storage only. Other uses may cause product to tip. An anti-tip strap is provided.

- * Do not allow anyone to climb on unit.
- * Put heavy items on lower drawers or shelves.
- * Open one drawer at a time.

Tools


You will need a standard flat-head screwdriver, Phillips head screwdriver, hammer, drill with a 1/4" drill bit and a tape measure. We've included a hex wrench.

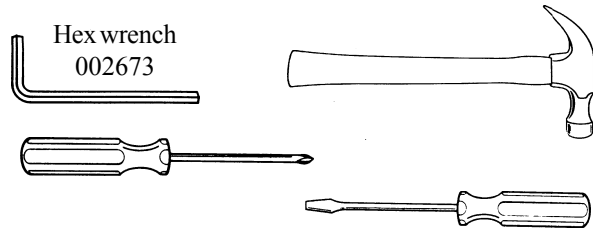

Parts List

Screws are shown actual size. Hardware may be shown smaller than actual size. Before you begin assembly, lay all pieces out on the floor according to these illustrations.

Note: For reasons of manufacturing efficiencies, you may find extra hardware and unused holes in parts.

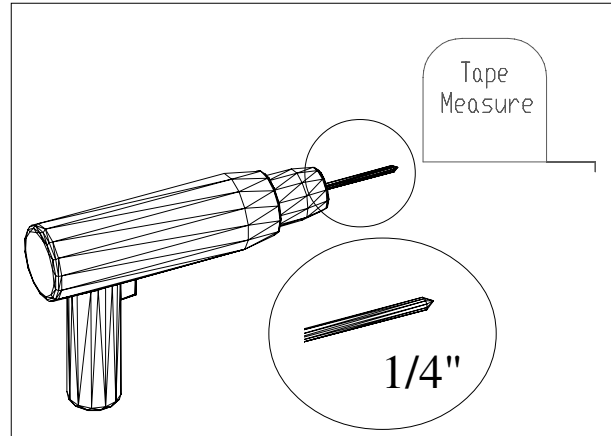

S2 1/2" Round-head Screw (36)
003239



S3 1/2" Flat Head Screws (24)
009686




7/8" Hardware Bolt (6)
001092



S4 2" Hex Head Screw (6)
006484



CS Long Cam Stud (12)
009612




LB Plastic L-Bracket (10)
001136




CH Cam Housing (24)
009613



SCS Short Cam Stud (12)
009611




Nail (55)
002669




Glue
004821

Note: All parts may not be identified with labels, but to help identify certain parts, you may see one or more types of labelling. One type is the peel-off label and the other is an ink-print on one of the unfinished edges.


Drawer Guides




007420 (3) stamped "CR"




007419 (3) stamped "CL"




007422 (3) stamped "DR"




007421 (3) stamped "DL"




Magnetic Catch Set (2)
MC Magnetic Catch,
SP Strike Plate
Screws
008075




Cover-cap (10)
80097153




KB Knob (6)
80099111




TP Touch-Up Pen (1)
80085010

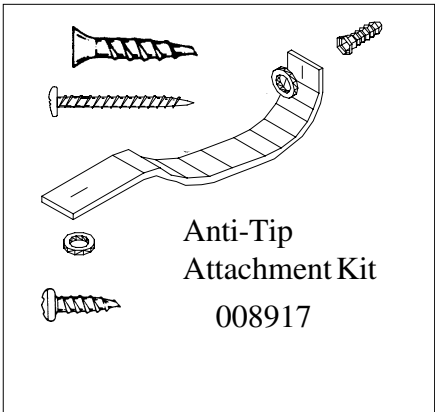


Anti-Tip
Attachment Kit
008917

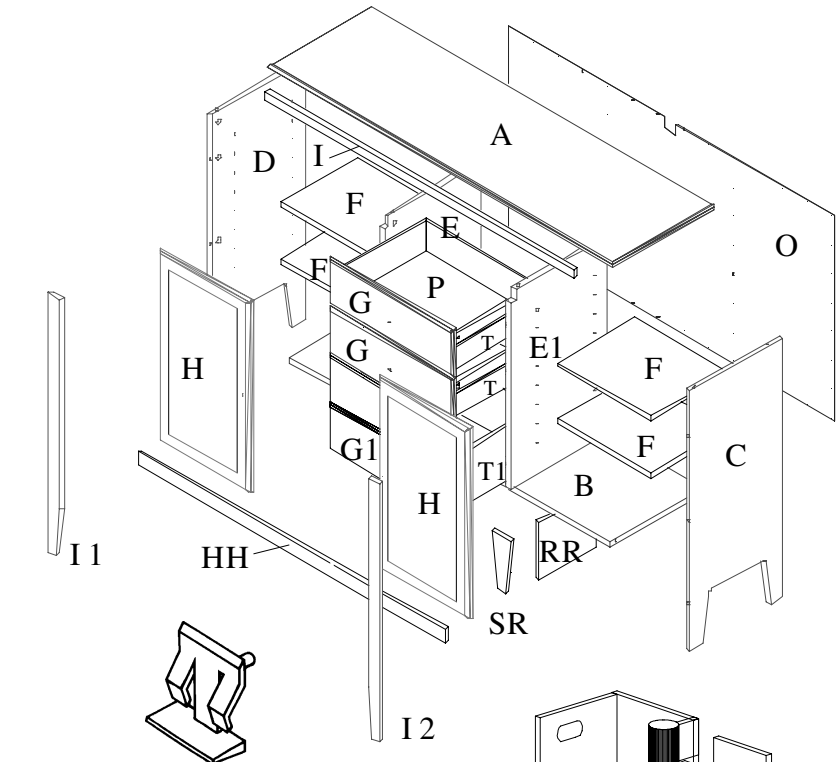


LPN Locking Shelf Pins (16)
004053




HG Hinge (4)
80071423




WD Wooden Dowel (2)
002314

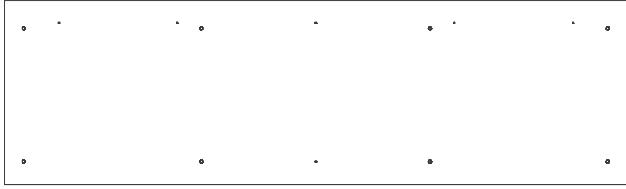


A Top (1)
53" x 15-9/16"
015306TF

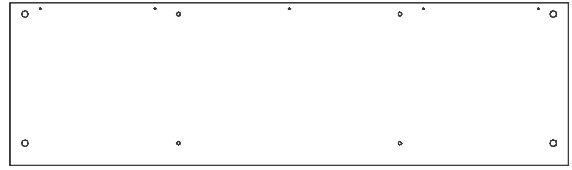


B Bottom (1)
49-1/16" x 14-3/16"
024911TF

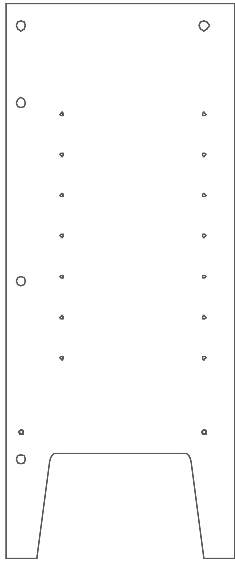


D Left Side (1)
34-5/16" x 14-3/16"
043407TF

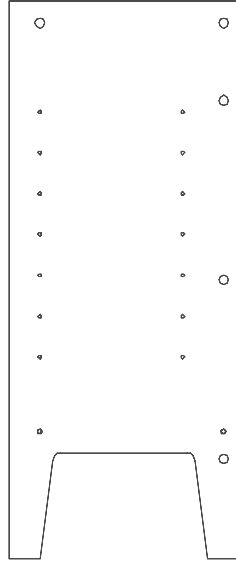


C Right Side (1)
34-5/16" x 14-3/16"
033407TF




E Left Partition (1)
26-3/16" x 14-13/16"
052704TF

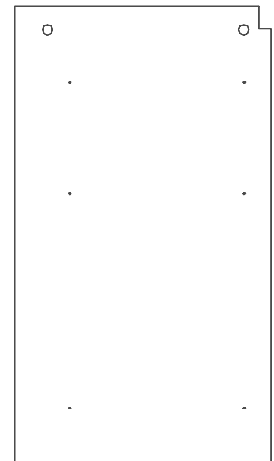

E1 Right Partition (1)
26-3/16" x 14-13/16"
052703TF



I Top Front Rail (1)
47-3/16" x 1-1/4"
094726TF




HH Bottom Front Rail (1)
47-3/16" x 1-5/8"
094727TF



I1 Left Vertical Rail (1)
34-1/4" x 1-5/8"
093446TF




I2 Right Vertical Rail (1)
34-1/4" x 1-5/8"
093445TF

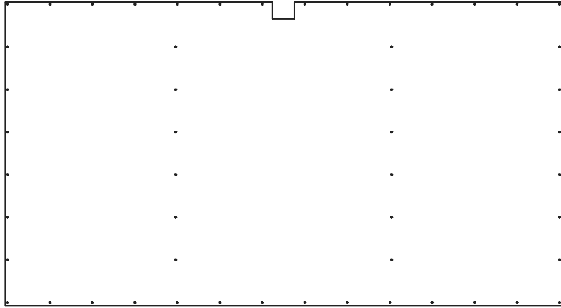

O Back Panel (1)
50-1/16" x 27-5/16"
80085348




SR Support Foot (1)
7-3/8" x 2-15/16"
090706TF




H Door (2)
25-3/8" x 13-15/16"
082526TF




RR Support (1)
7-1/2" x 7-7/16"
440707TF




G Upper Drawer (2)
19-7/16" x 6-1/4"
071923TF

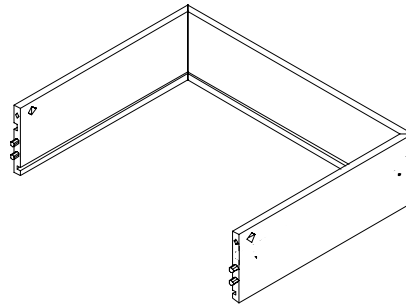

T Upper Drawer Sides (2)
45-5/16" x 4-5/8"
204510T




G1 Lower Drawer (1)
19-7/16" x 12-5/8"
071924TF



P Drawer Bottom (3)
17-3/8" x 13-9/16"
80085550




F Adjustable Shelf (4)
14-1/4" x 13-3/4"
061409TF

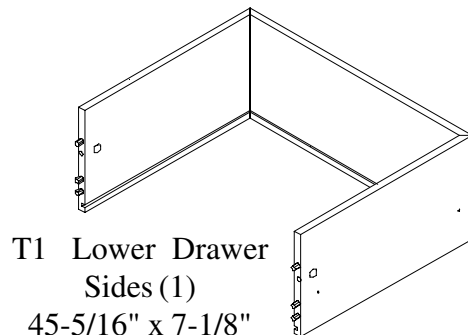

T1 Lower Drawer Sides (1)
45-5/16" x 7-1/8"
204511T

Drawer Assembly for (2) Drawers (G) and (1) Drawer (G1). Follow Steps 1-6 for each drawer.

1

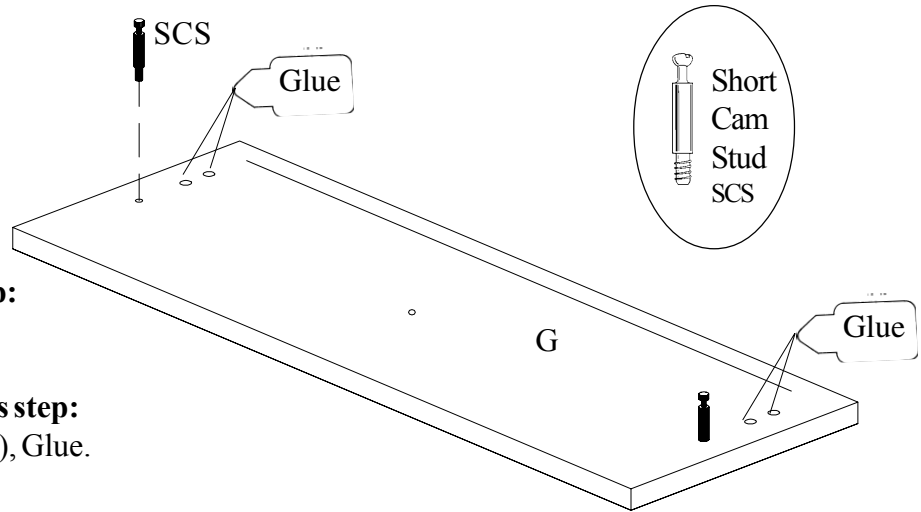

Parts needed for this step:

Drawer (G).

Hardware needed for this step:

(2) Short Cam Studs (SCS), Glue.

Action Required:

- * Screw (2) **short** cam studs (SCS) into the holes, as shown, in drawer front (G).
- * Apply 3 - 4 drops of glue into each dowel hole in drawer front, but do not fill with glue.
- * Spread glue evenly on the inside of the holes with a toothpick or similar object.
- * Set aside.

2

Handle Drawer Sides with Care

Parts needed for this step:


Drawer Sides (T), Drawer Bottom (P).

Hardware needed for this step:

(2) Cam Housings (CH), glue.

Action Required:

- * Place drawer sides (T) as shown in diagram.
- * **SEE FIGURE 1**...Insert (2) cam housings (CH) into the holes in drawer sides (T). **Press down with thumb to fully seat cam housings.**
- * Apply glue into the corner joints of drawer sides (T).
- * Stand drawer bottom (P) in long groove, **finished side up**, and fold the drawer sides (T) up around the drawer bottom (P).

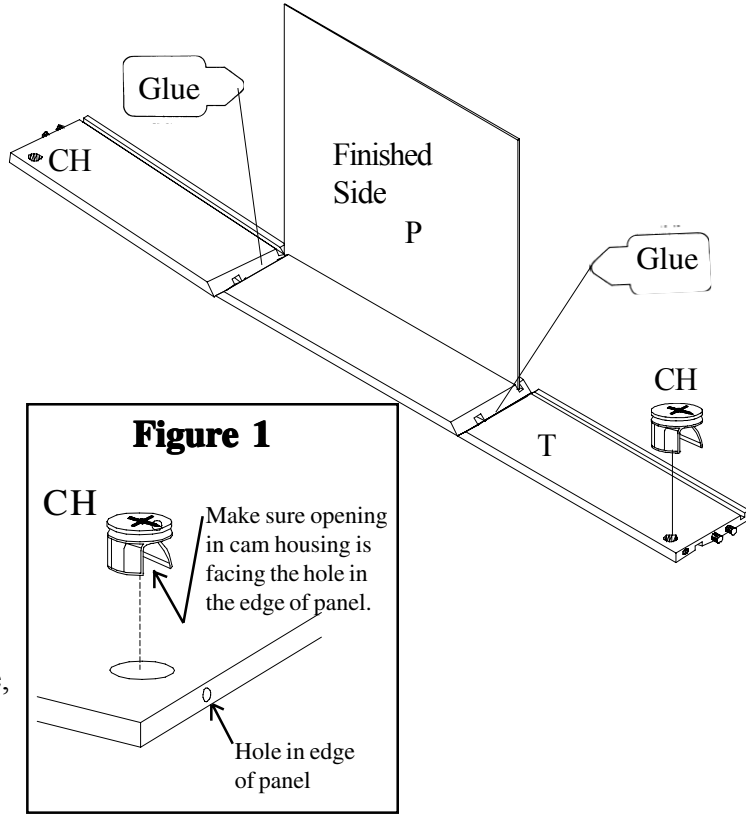

3

Parts needed for this step:

(2) Drawer Sides (T), Drawer (G).

Hardware needed for this step:

Standard Flat-Head Screwdriver.

Action Required:



- * Place drawer front (G), as shown in diagram.
- * Place the dowels in the drawer sides (T) into the holes in drawer front (G).

Note: Cam studs should align with holes in drawer sides (T).

- * Press down on the back of the drawer. If necessary, turn drawer with drawer front up and tap on drawer front, using a hammer against a block of wood wrapped in a protective cloth.

Note: Make sure drawer bottom inserts into drawer front groove.

- * Wipe off excess glue with a damp cloth.
- * Lock cam housings with a half turn clockwise of a standard flat-head screwdriver.

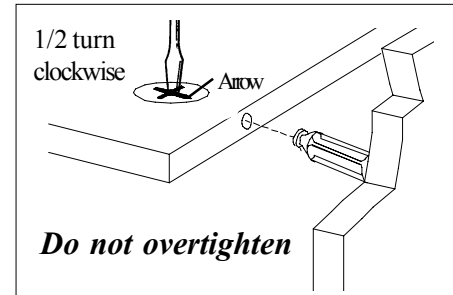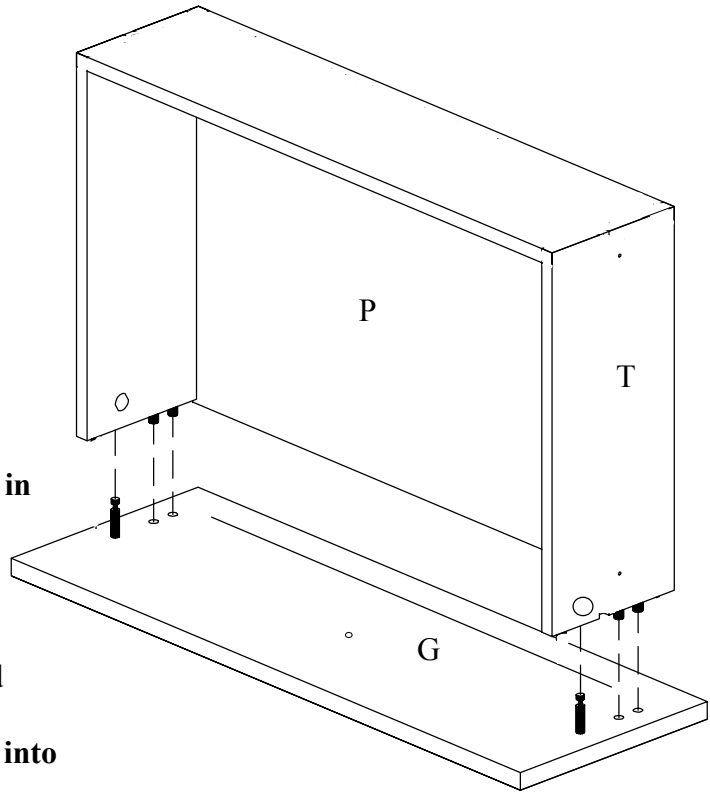



4

Hardware needed for this step:
Drawer Guide stamped "DR",
Drawer Guide stamped "DL", (4)
Flat-Head Screws (S3).

Action Required:

Note: There is a right drawer guide (stamped "DR") and a left drawer guide (stamped "DL").

* Attach drawer guides to drawer sides (T), with rollers facing toward the back, using (2) **flat-head** screws (S3) in each drawer guide. The drawer guides have a lip on one edge. The lip goes toward the top of the drawer, as shown.

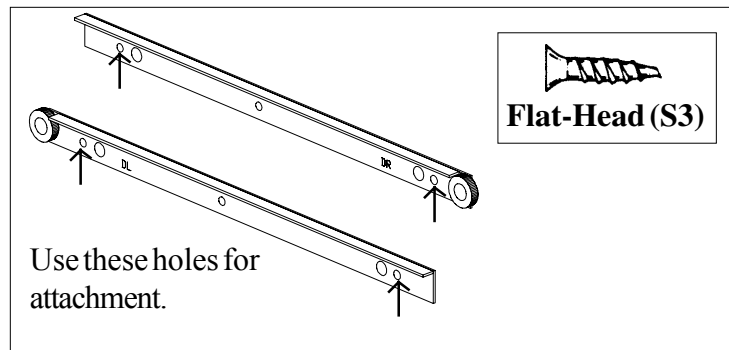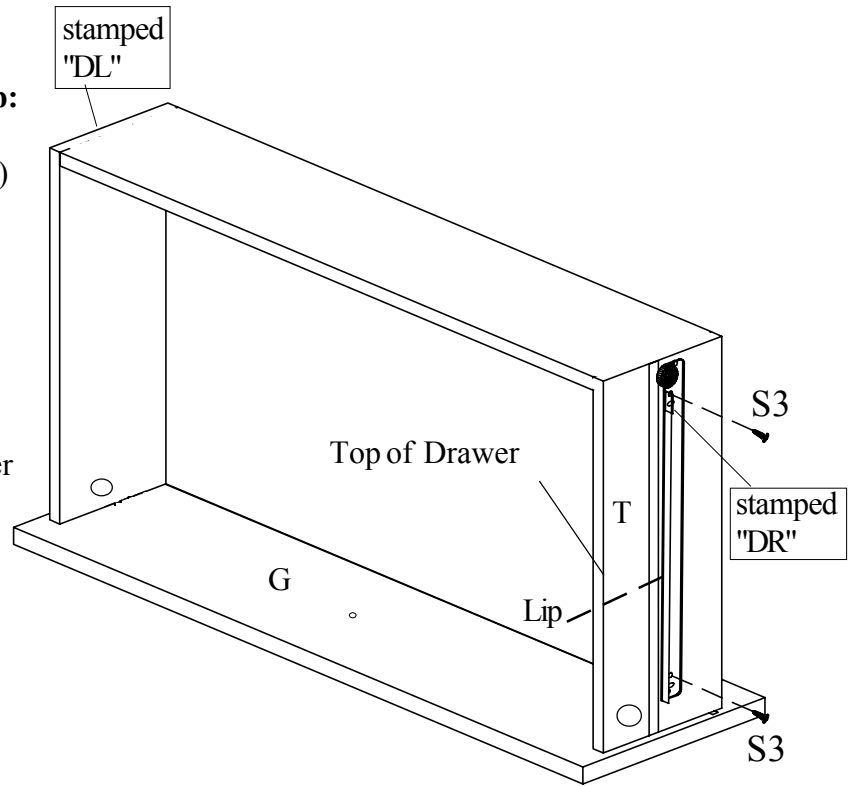

5


* Repeat Steps 1-4 for other Drawer (G) and Drawer (G1).

6

Hardware needed for this step:
(4) Knobs (KB), (4) 7/8" Hardware Bolts.

Action Required:

* Attach knobs to drawers (G & G1), using (4) 7/8" hardware bolts (HB).

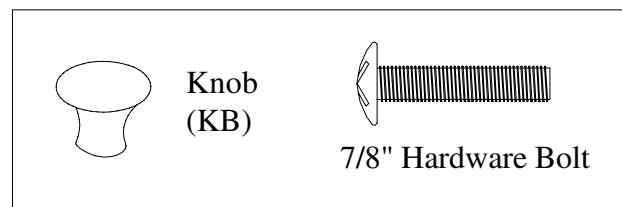

Subassembly


7

Parts needed for this step:
Left Vertical Rail (I1), Right Vertical Rail (I2).

Hardware needed for this step:
(6) Short Cam Studs (SCS).

Action Required:

* Screw (6) **short** cam studs (SCS) into the holes, as shown, in rails (I 1 & I 2).

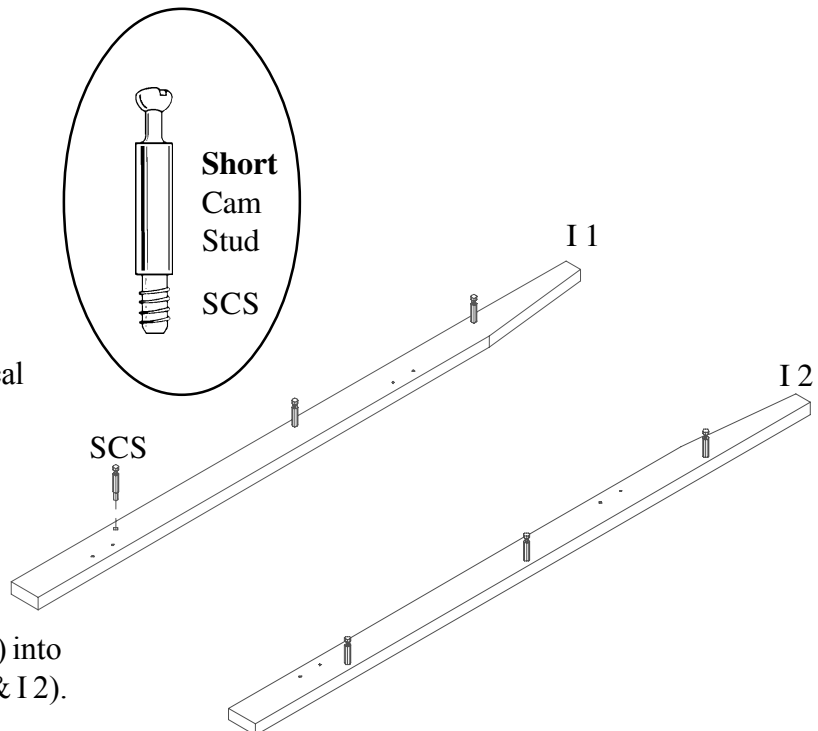

8

Parts needed for this step:


Left Vertical Rail (I1), Right Vertical Rail (I2)

Hardware needed for this step:

(4) Hinges (HG), (8) Round-Head Screws (S2).

Action Required:

* Attach (4) hinges (HG) to rails (I1 & I2), **slots as shown**, using (8) round-head screws (S2).

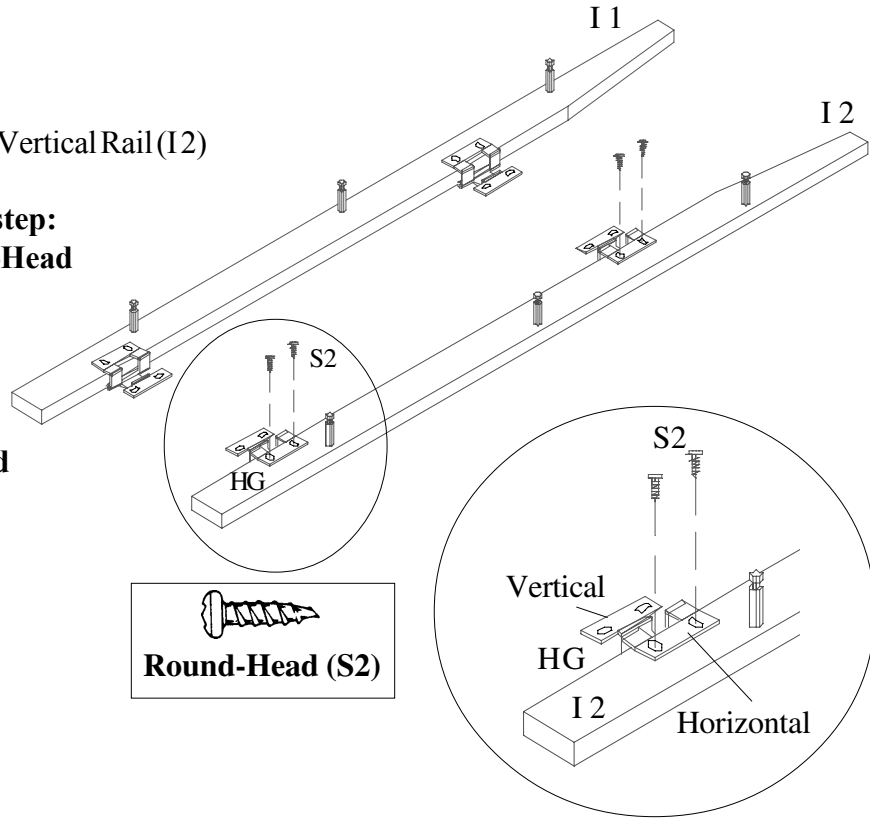

9



Parts needed for this step:



Top (A), Top Front Rail (I).

Hardware needed for this step:

(8) Long Cam Studs (CS), (5) L-Brackets (LB), (10) Round-Head Screws (S2).

Action Required:

* Screw (8) long cam studs (CS) into the holes, as shown, in top (A).
* Attach (5) L-Brackets (LB) to top front rail (I), using (5) round-head screws (S2).
* Attach top front rail (I), **finished edge up**, to top (A), using (5) round-head screws (S2).

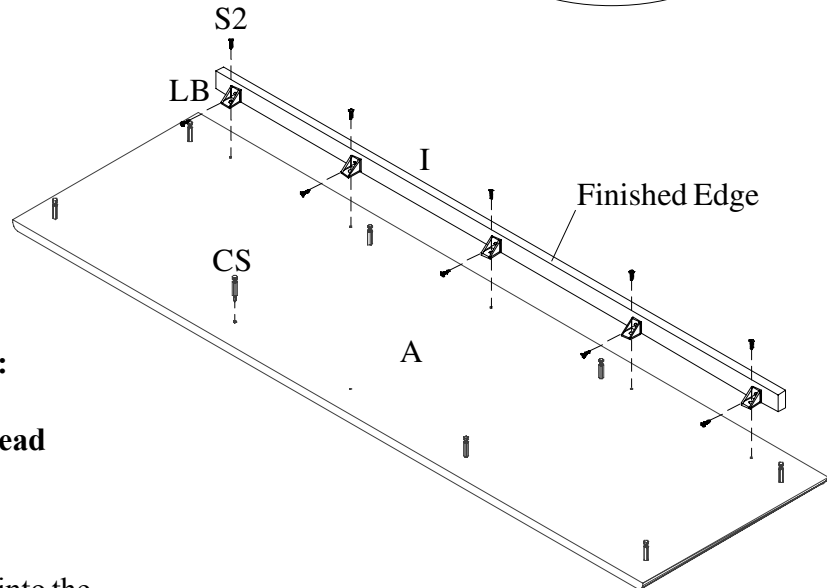

10

Parts needed for this step:

Support (RR), Support Foot (SR).

Hardware needed for this step:

(2) Wooden Dowels (WD), Hammer.




Action Required:

* *Apply 3-4 drops of glue into the two dowel holes in the outer edge of support (RR); do not fill with glue. Carefully tap (2) wooden dowels (WD) into the outer holes, as shown, in support (RR).*

Note: Leave approximately 3/8" of the dowels sticking out.

* *Apply 3-4 drops of glue into the two dowel holes in support foot (SR); do not fill with glue.*

* Place support foot (SR) to support (RR), as shown. If necessary, tap on support foot (SR), using a hammer against a block of wood wrapped in a protective cloth.

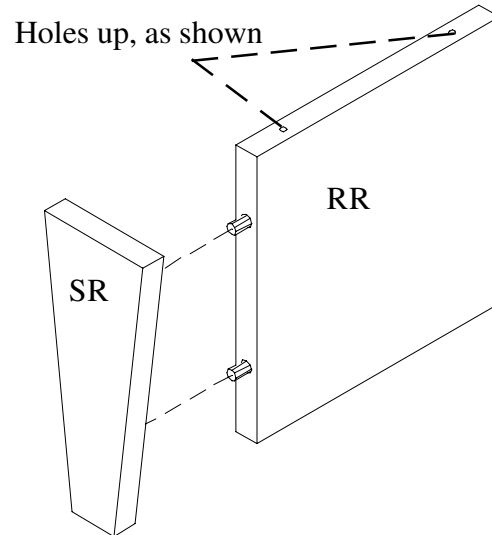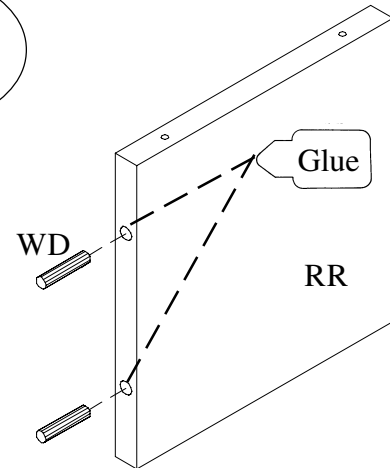

11

Parts needed for this step:


Bottom (B), Bottom Front Rail (HH), Support (RR) with Support Foot.

Hardware needed for this step:

(4) Cam Housings (CH), (5) L-Brackets (LB), (10) **Round-Head** Screws (S2), (2) Hex-Head Screws (S4), Hex-Wrench (provided).

Action Required:

- * **SEE FIGURE 1**...Insert (4) cam housings (CH) into the holes, as shown, in bottom (B).
- * Attach (5) L-Brackets (LB) to bottom (B), using (5) **round-head** screws (S2).
- * **SEE FIGURE 2**...Attach bottom front rail (HH) to bottom (B), using (5) **round-head** screws (S2).
- * Attach support (RR) to bottom (B), using (2) hex-head screws (S4). Hex-wrench is provided.

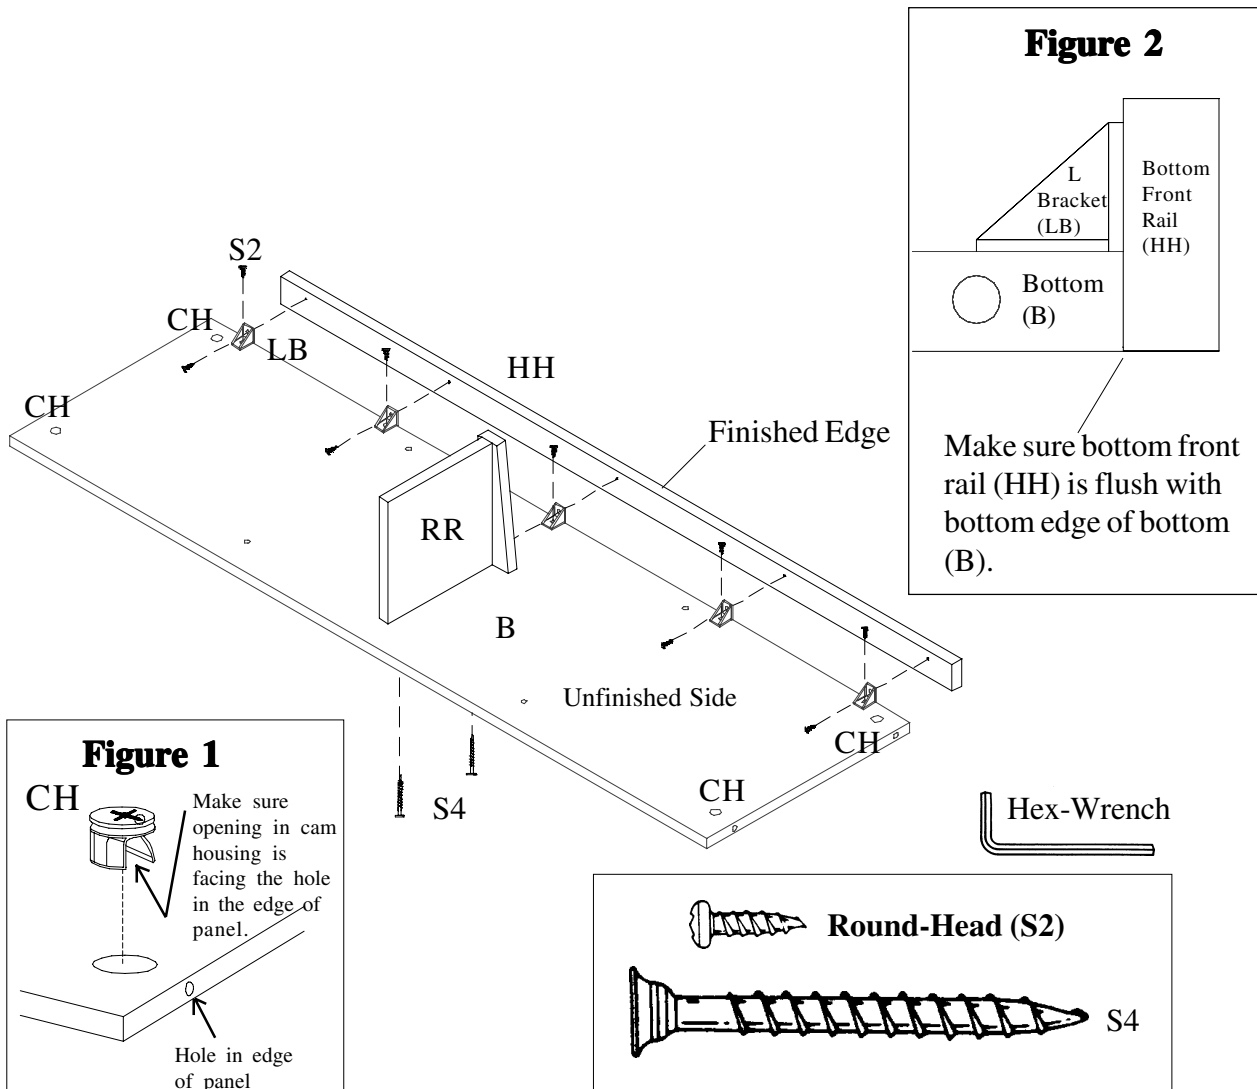

12

Parts needed for this step:

Left Side (D), Right Side (C).



Hardware needed for this step:

(4) Long Cam Studs (CS), (10) Cam Housings (CH).

Action Required:

* Screw (4) long cam studs (CS) into the holes, as shown, in sides (D & C).

* **SEE FIGURE 1**...Insert (10) cam housings (CH) into the holes, as shown, in sides (D & C).

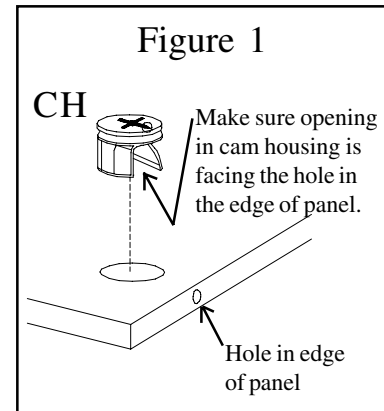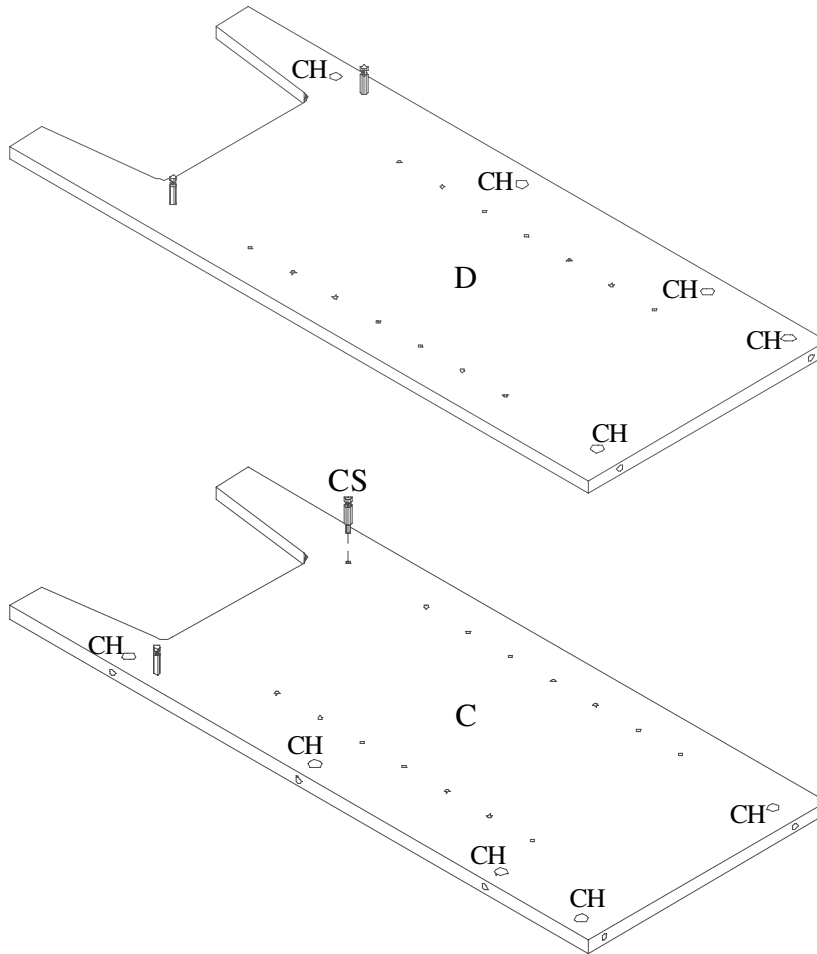

13

Parts needed for this step:

Left Partition (E), Right Partition (E1).




Hardware needed for this step:

- (3) Drawer Guides stamped "CL",
- (3) Drawer Guides stamped "CR",
- (12) **Flat-Head** Screws (S3),
- (4) Cam Housings (CH).

Action Required:

Note: There is a left and a right drawer guide. The guide stamped "CL" will be attached to partition (E) and the guide stamped "CR" will be attached to partition (E1).

- * **SEE FIGURE 3...** attach drawer guides to partitions (E & E1), using (2) **flat-head** screws (S3) in each guide.
- * Insert (4) cam housings (CH) into the holes, as shown, in partitions (E & E1).

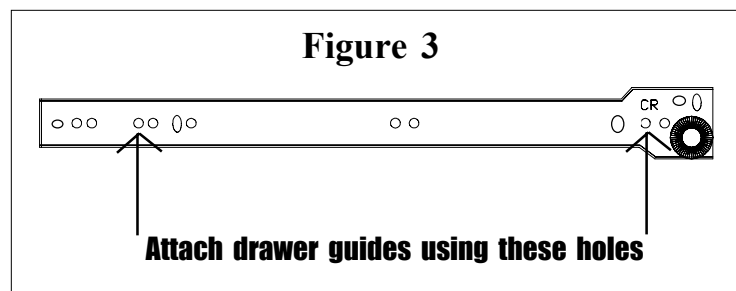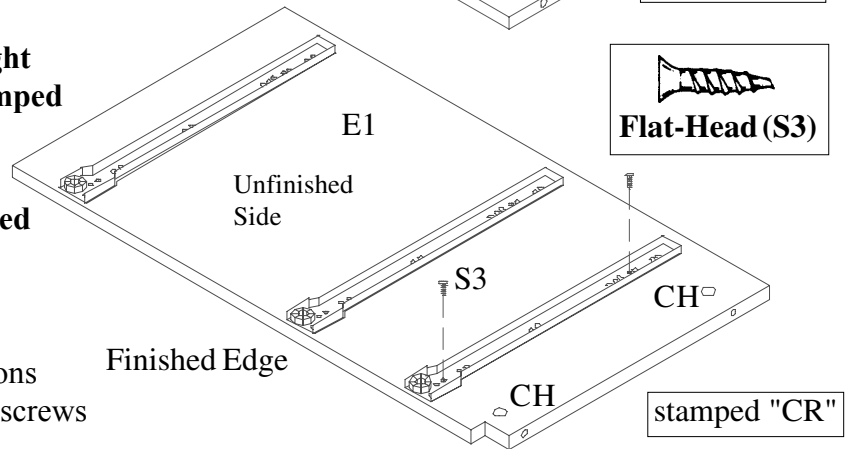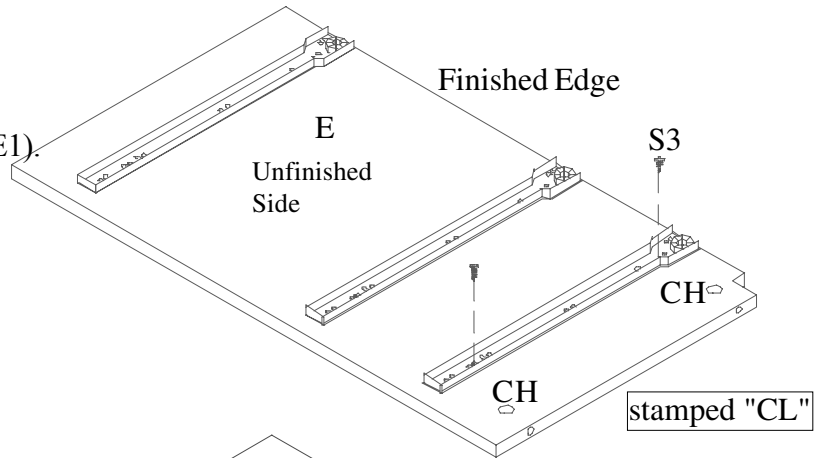

Main Assembly



14

Parts needed for this step:
Bottom (B), Left Partition (E), Right Partition (E1).


Hardware needed for this step:
(4) Hex-Head Screws (S4), Hex-Wrench (provided).

Action Required:

* Attach partitions (E & E1), **finished edge up**, to bottom (B), using (4) Hex-Head screws (S4). Hex-wrench is provided.

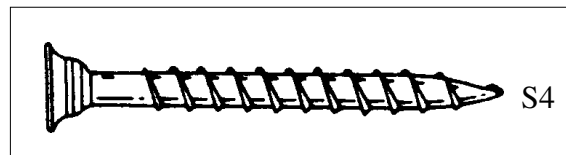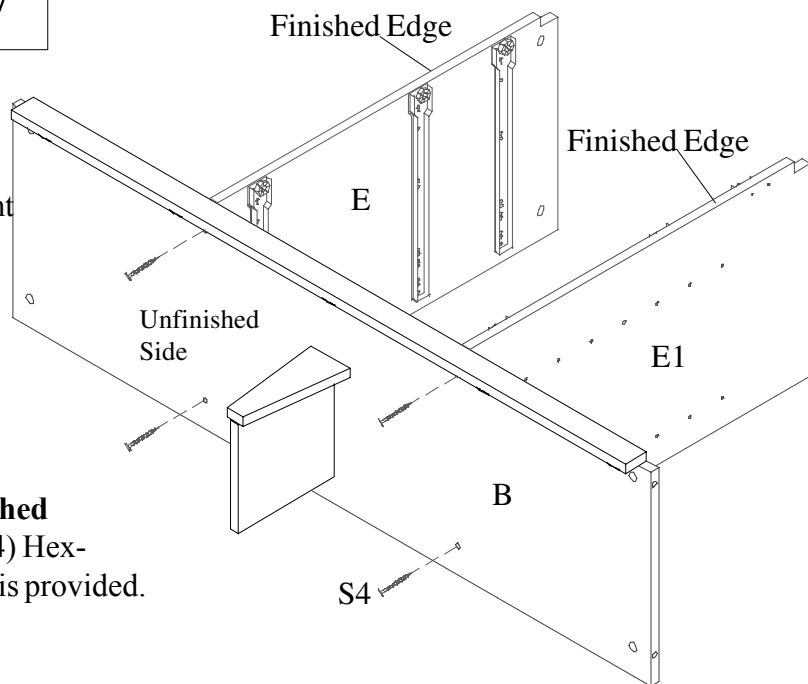

15

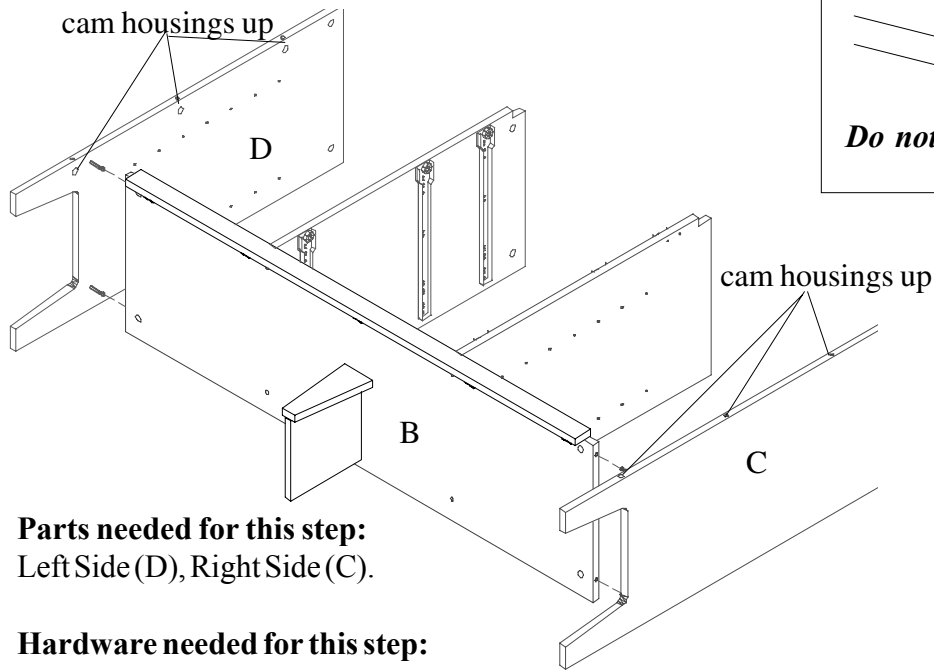

Parts needed for this step:
Left Side (D), Right Side (C).

Hardware needed for this step:
Standard Flat-Head Screwdriver.

Action Required:

- * Attach sides (D & C) to bottom (B), as shown.
- * Lock cam housings with a half turn clockwise of a standard flat-head screwdriver.


16

Parts needed for this step:
Top (A).

Hardware needed for this step:
Standard Flat-Head Screwdriver.

Action Required:

- * With a helper, attach top (A) to sides (D & C) and partitions (E & E1).
- * Lock cam housings with a half turn clockwise of a standard flat-head screwdriver.

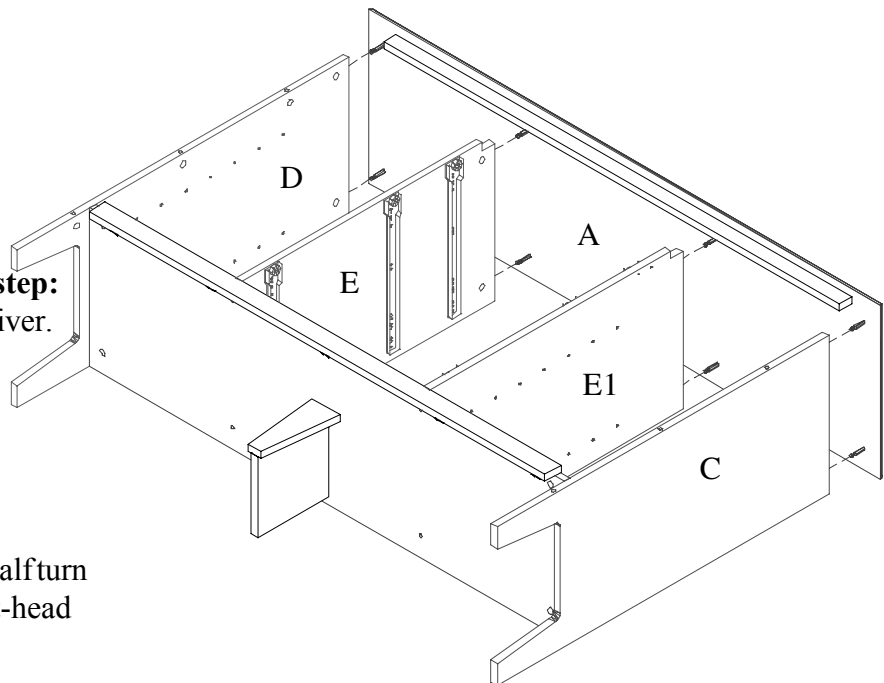

17

Parts needed for this step:


Left Vertical Rail (I 1),
Right Vertical Rail (I 2).

Hardware needed for this step:

Standard Flat-Head Screwdriver,
Phillips-Head Screwdriver.

Action Required:

- * Attach rail (I 1) to side (D).
- * Lock cam housings.
- * Attach rail (I 2) to side (C).
- * Lock cam housings.
- * *If necessary, adjustment may be made to top front rail (I) and bottom front rail (HH) by loosening screws in L-Brackets, adjusting and retightening.*

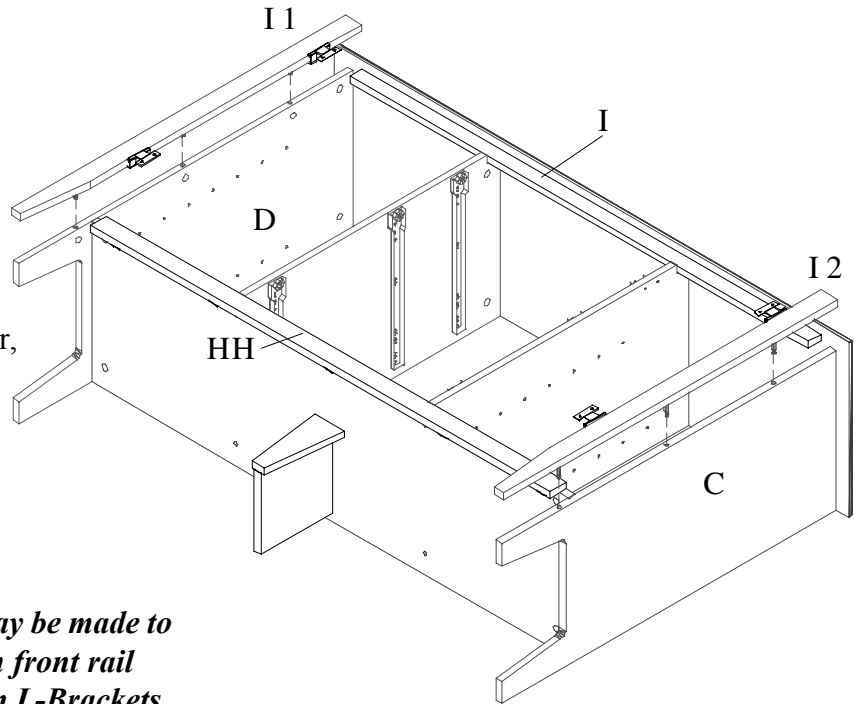

18

Parts needed for this step:


Back Panel (O).

Hardware needed for this step:

Nails, Hammer.

Action Required:

- * **Fold hinges in rails (I 1 & I 2) to prevent bending before placing unit on its front.**
- * With a helper, carefully turn unit over with the front against the floor.
- * Position back panel (O) even with the bottom edge of bottom (B).
- * Make sure panel (O) fits square and even side to side. If it doesn't, adjust unit into square by pushing or pulling on one corner of the unit until back panel fits squarely.
- * Before nailing into pilot holes, make sure holes in back panel align with partitions (E & E1).

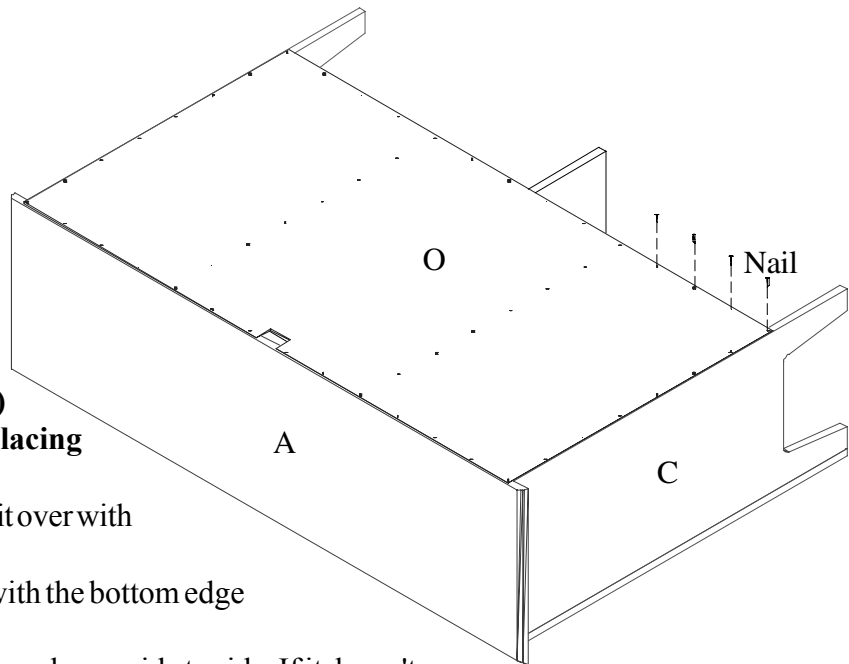


Note: Back panel adds stability to case.

Note: Make sure all cam housings are in the locked position.

19

WARNING

Case can tip over. The manufacturer requires that you follow the instructions below to anchor unit to stud or wall. *If for some reason the Anchor Kit is missing, please call this Toll Free number 1-800-782-3876.*

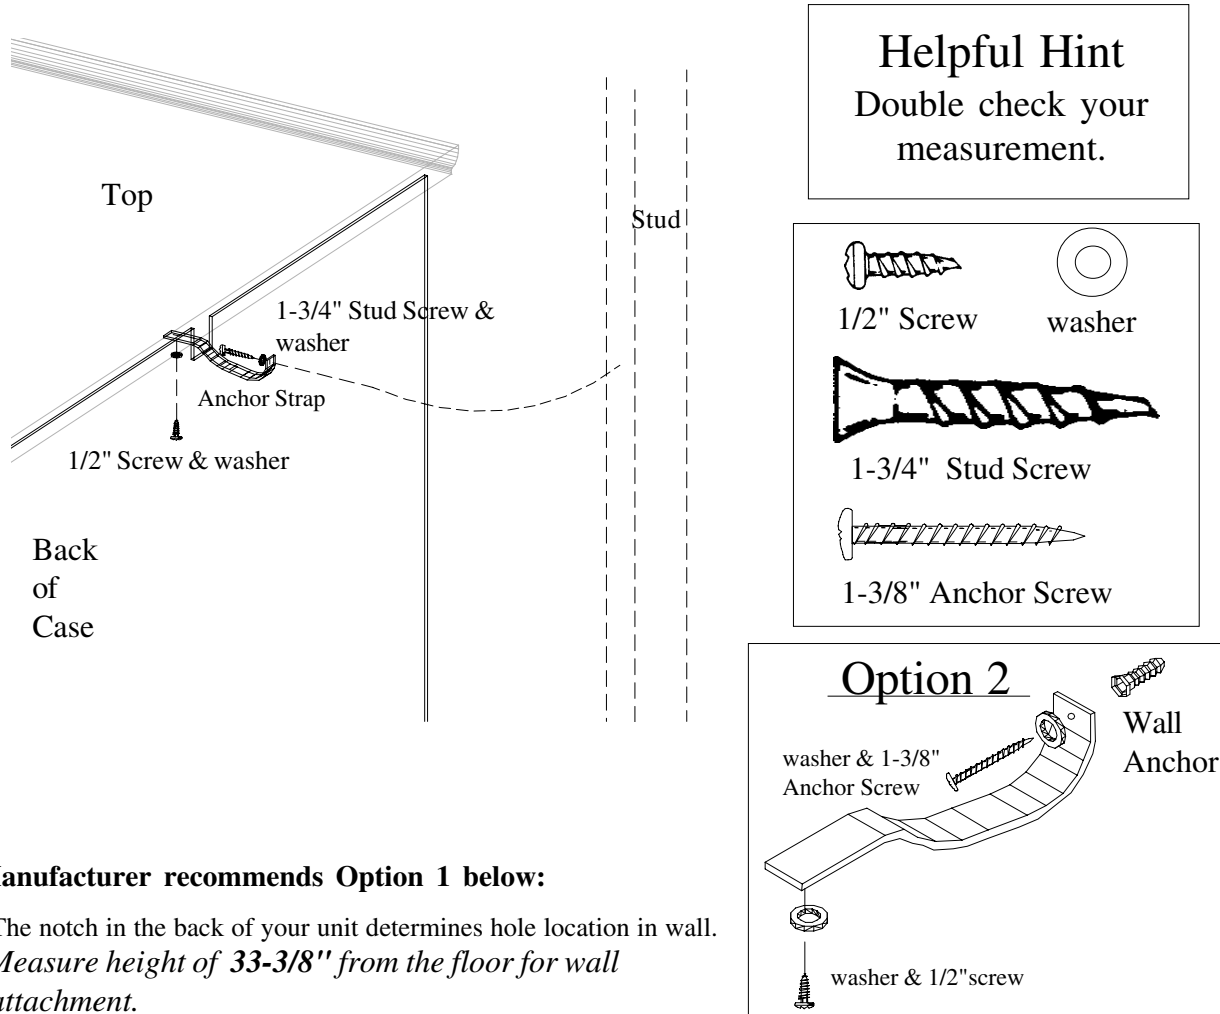

Manufacturer recommends Option 1 below:

The notch in the back of your unit determines hole location in wall. *Measure height of 33-3/8" from the floor for wall attachment.*

Option 1...TO ATTACH TO STUD IN WALL...SEE HELPFUL HINT

- * Attach anchor strap to a stud in the wall with the washer and 1-3/4" stud screw, **using the end of the anchor strap with the hole.**
- * Position unit in its final location.
- * **Note: Do NOT allow slack in anchor strap.** Secure anchor strap through the notch in the unit to the hole in the underside of top, using washer and 1/2" screw.

Option 2...TO ATTACH TO DRYWALL...SEE HELPFUL HINT

- * Drill a 1/4" diameter hole in the drywall.
- * Tap wall anchor into hole until flush.
- * Attach anchor strap to wall anchor with washer and 1-3/8" anchor screw, **using the end of the anchor strap with the hole.**
- * Position unit in its final location.
- * **Note: Do NOT allow slack in anchor strap.** Secure anchor strap through the notch to the hole in the underside of top, using washer and 1/2" screw.

20

Parts needed for this step:

(4) Adjustable Shelves (F).


Hardware needed for this step:

(2) Magnetic Catches (MC),

(16) Locking Shelf Pins (LPN).

Action Required:

- * **SEE HELPFUL HINT**...Attach (2) magnetic catches (MC) to partitions (E & E1), using the small round-head screws provided in the small plastic bag.
- * To install (4) adjustable shelves (F), push locking shelf pins (LPN) into the holes at the height you desire.
- * Position the shelves so they rest on top of the locking shelf pins and push down to lock in place.

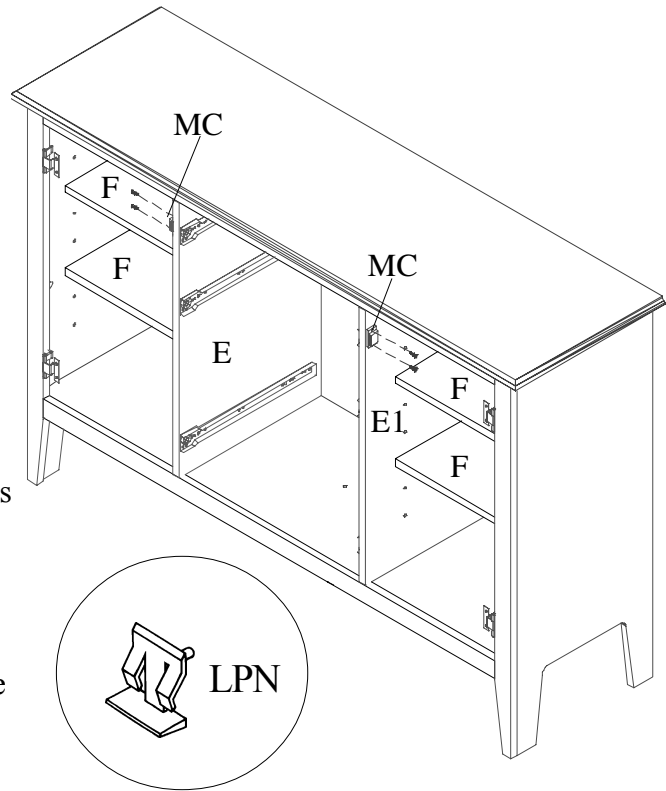


Helpful Hint


Magnets in magnetic catch sets (MC) should face the front of the unit. Slide magnetic catch (MC) as far as you can toward the front edge of partitions (E & E1) before tightening.

21

THIS UNIT HAS BEEN DESIGNED FOR THE WEIGHTS SHOWN. EXCEEDING THESE RECOMMENDED WEIGHTS COULD RESULT IN EXCESSIVE "SAGGING" OF THE SHELF. EXTREME OVERLOADING COULD CAUSE FAILURE OF THE SHELF AND POSSIBLE INJURY.

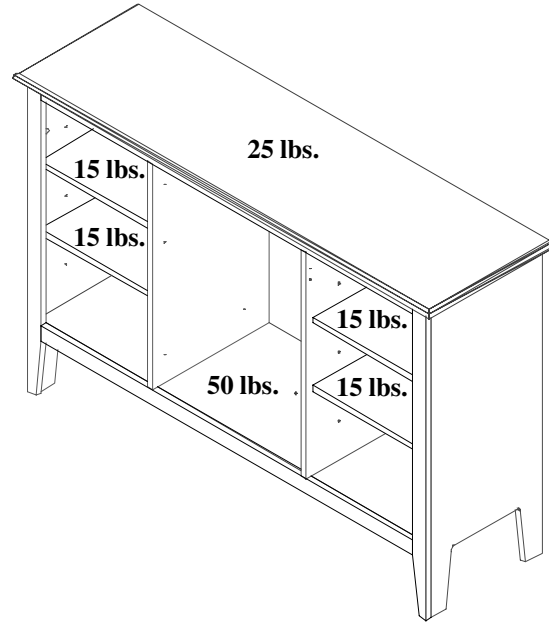

22

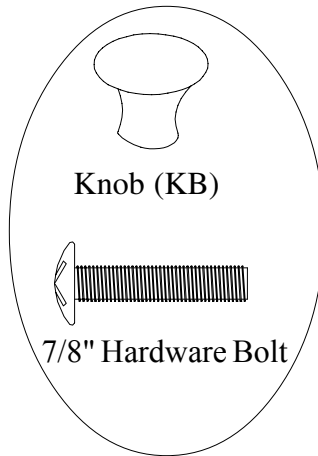

Parts needed for this step:

(2) Doors (H).

Hardware needed for this step:

(8) Round-Head Screws (S2),

(2) Strike Plates (SP), (2) Knobs (KB),

(2) 7/8" Hardware Bolts.



Action Required:

* Attach doors (H) to rails (I1 & I2), using (2) screws (S2) in each hinge.

* **Adjustment may be made to doors (H) by loosening screws in hinges, adjusting and retightening.**


* Attach strike plates (SP) to doors (H), using the flat-head screws provided in the small plastic bag.

* Attach knobs (KB) to doors (H), using (2) 7/8" hardware bolts.

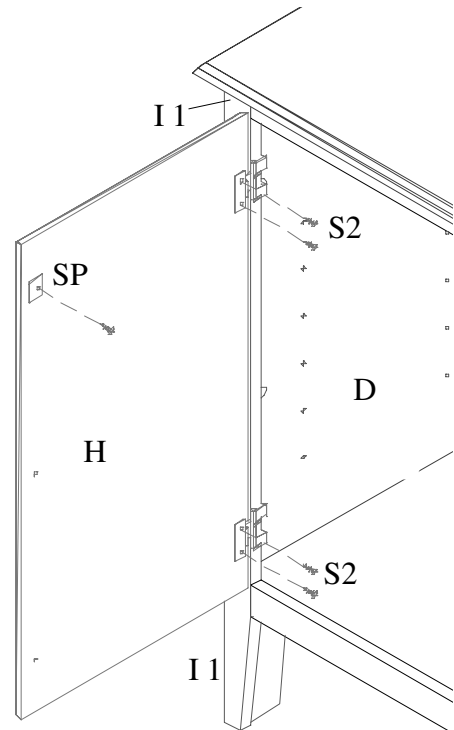

23

* Decorative cover caps are provided to cover exposed cam housings.

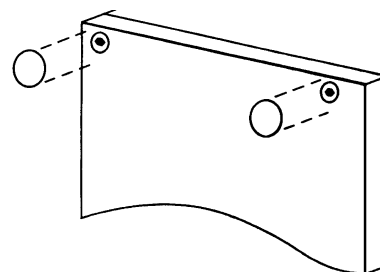

24

Install the drawers.



A **touch-up pen** has been provided for any touch up needed.

That's it! You've finished assembling your 3 Drawer / 2 Door Dresser by



MRP- 80099116 (Carysbrook)
0704